

DAWSON™

HS LED STREET LIGHT

D-ST10X



XTRA-MILES Sdn. Bhd. 968820-K

39, Lorong Impian Indah 16, Taman Impian Indah,
14000 Bukit Mertajam, Penang.
Tel : +6 017-914 5856 Fax: +6 04-587 2679 Email: myxmiles@gmail.com
Website: www.xtra-miles.com



Scan me

Xtra Miles Sdn Bhd (968820-K)

Key Features:



Bird Spike

Birds are prevented from landing on the fixtures.
(For 180W, 240W, 300W)



Buckle

Buckle on the tail is easily opened by pressing.

Smart Structure

Free-tool Maintenance

- There is a button at the roof cover, just push it and unlock the driver.
- Only one person can open the fixture easily without any tools.
- Smooth body would not accumulate dust, sand, Installation Method Pole Mounting (Adjustable Angle) or other solid material.



Spigot adjustable by +15°~-15°





Knock the central circle, optionally install the photocell

Mounting Option



Flexible Installation Angle

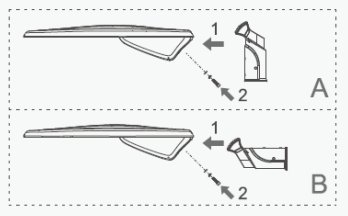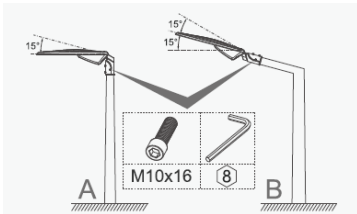

Applications:

- Fast-speed, Medium-speed, and Low-speed roads.
- Parking lot
- Factory compound
- Outdoor sports ground
- Shopping Mall
- Square centers

SPECIFICATIONS

Part Number	D-ST10-030	D-ST10-050	D-ST10-070	D-ST10-090	D-ST10-120	D-ST10-150	D-ST10-180	D-ST10-240	D-ST10-300
Wattage	30W	50W	70W	90W	120W	150W	180W	240W	300W
Luminous Flux	4,200lm	7,000lm	9,800lm	12,600lm	16,800lm	21,000lm	27,000lm	36,000lm	45,000lm
Efficiency	140lm/W						150lm/W		
Input Voltage	AC100~240V, 50/60 Hz								
LED & Driver	Nichia chip/ Sosen driver built in 12KV SPD								
CCT	4000K (3000K, 5000K optional)								
CRI	> Ra70								
Power Factor	> 0.92								
IP Rating	IP66								
Surge Protection	12kV line-earth/ Class 1 Protection								
Life Time	>200,000Hrs(Ta=30°C@L70)								
Operating Temperature	-30°C to +50°C								
Material	ALU Alloy (Housing)+ PC lens+Tempered glass								
Product Dimension	649×272×179mm			762×336×179mm			889×378×192mm		
Weight	6.9 kg			8.5 kg			8.7 kg		11.9 kg

